


r H11 mm	d1 mm	d2 mm	d3 mm	l1 mm	l2 mm
3	12	12	6	60	13
4	14	12	6	60	13
5	16	12	6	60	14
6	20	16	8	67	15
7	22	16	8	71	17
8	24	16	8	71	19
10	28	25	8	85	25
12	34	25	10	90	27
14	44	25	16	100	30
16	48	25	16	100	33
18	52	32	16	112	36
20	56	32	16	112	40

HSS-E (Cobalto)



1664
DIN 6518 A

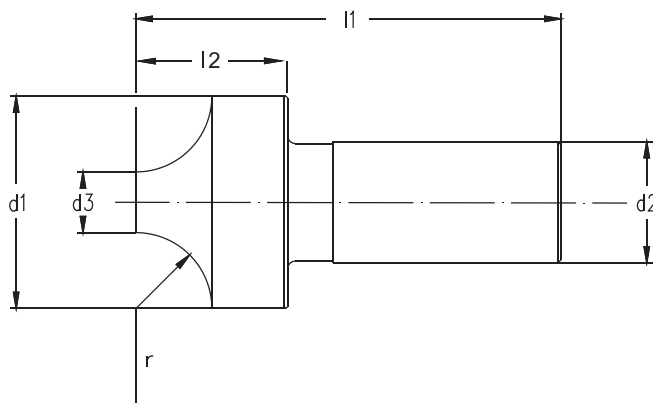

Fresa de perfil constante 1/4 de círculo, haste cilíndrica, detalonada radial e axial, corte à direita.

Ex. de especificação: 1664 - r 10