


r h 11 mm	d1 js 16 mm	b mm	d2 H7 mm
0,75	50	1,5	16
1	50	2	16
1,25	50	2,5	16
1,5	50	3	16
1,6	50	3,2	16
1,75	50	3,5	16
2	50	4	16
2,5	63	5	22
3	63	6	22
3,15	63	6,3	22
3,5	63	7	22
4	63	8	22
4,5	63	9	22
5	63	10	22
5,5	80	11	27
6	80	12	27
6,3	80	12,6	27
7	80	14	27
8	80	16	27
9	100	18	32
10	100	20	32
11	100	22	32
12	100	24	32
12,5	100	25	32
13	125	26	32
14	125	28	32
15	125	30	32
16	125	32	32
17	125	34	32
18	125	36	32
19	125	38	32
20	125	40	32

r h 11 pol	d1 js 16 pol	b pol	d2 H7 pol
1/16	2	1/8	5/8
1/8	2 1/4	1/4	5/8
3/16	2 1/2	3/8	7/8
7/32	2 3/4	7/16	7/8
1/4	2 3/4	1/2	7/8
5/16	3	5/8	1
3/8	3 1/2	3/4	1
7/16	3 1/2	7/8	1
1/2	3 1/2	1	1
5/8	4 1/2	1 1/4	1 1/4

(HSS)

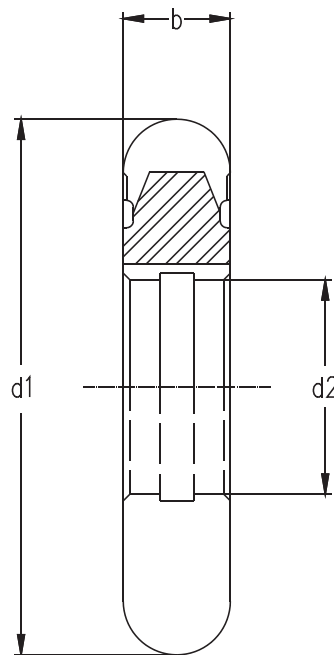

1371
DIN 856

Fresa de perfil constante, semi-circular convexa (detalonada).

Ex. de especificação: 1371 - r 5