


r H 11 mm	d1 js 16 mm	b mm	d2 H7 mm
1	50	6	16
1,25	50	6	16
1,5	50	8	16
1,6	50	8	16
2	50	9	16
2,5	63	10	22
3	63	12	22
3,15	63	12	22
3,5	63	16	22
4	63	16	22
5	63	20	22
6	80	24	27
6,3	80	24	27
7	80	28	27
8	80	32	27
9	90	36	27
10	100	36	32
12	100	40	32
12,5	100	40	32
14	100	48	32
15	125	50	32
16	125	50	32
18	125	56	32
19	125	60	32
20	125	60	32

(HSS)

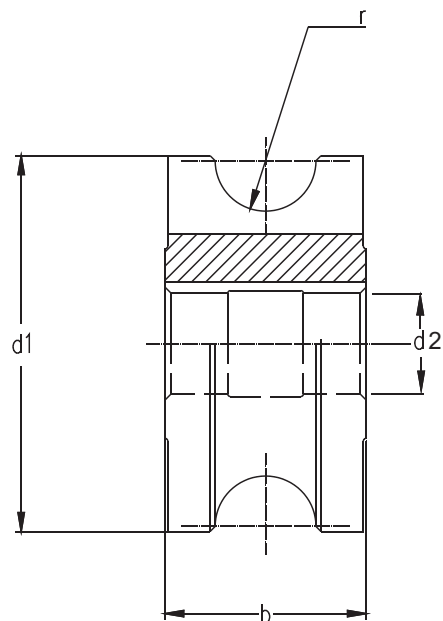

1381
DIN 855 A

Fresa de perfil constante, semi-circrcular cônica (detalonada).

Ex. de especificação: 1381 - r 5