


d1 js 14 mm	l2 / l1 curta mm	d2 h 8 mm
6	13 / 57	6
7	16 / 66	10
8	19 / 69	10
9	19 / 69	10
10	22 / 72	10
11	22 / 79	12
12	26 / 83	12
13	26 / 83	12
14	26 / 83	12
15	26 / 83	12
16	32 / 92	16
17	32 / 92	16
18	32 / 92	16
19	32 / 92	16
20	38 / 104	20
21	38 / 104	20
22	38 / 104	20
23	38 / 104	20
24	45 / 121	25
25	45 / 121	25
26	45 / 121	25
28	45 / 121	25
30	45 / 121	25
32	53 / 133	32
34	53 / 133	32
35	53 / 133	32
36	53 / 133	32
38	63 / 155	40
40	63 / 155	40
45	63 / 155	40
48	75 / 177	50
50	75 / 177	50
56	75 / 177	50
63	90 / 192	50

HSS-E (Cobalto)

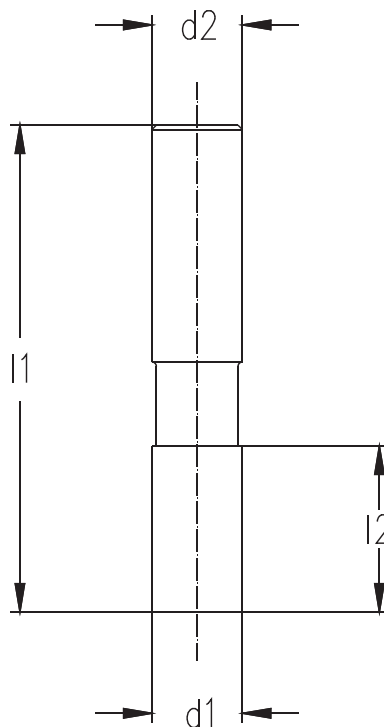


1505

DIN 844 A - NF
série curta

1506

DIN 844 A - NR
série curta

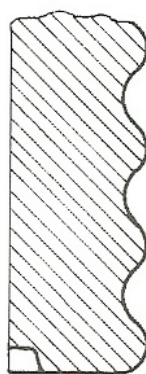

NR



NF

Tipo **NR** = Desbaste

Tipo **NF** = Semi acabamento

Fresa de topo para desbaste, tipo "CHIPMASTER", haste cilíndrica, corte à direita, vários cortes com hélice à direita ~ 25°

Ex. de especificação: 1506 - 14 x 26/83 x 12